


# Promessa — Ultrafabrics






363-5354 Galaxy Fog

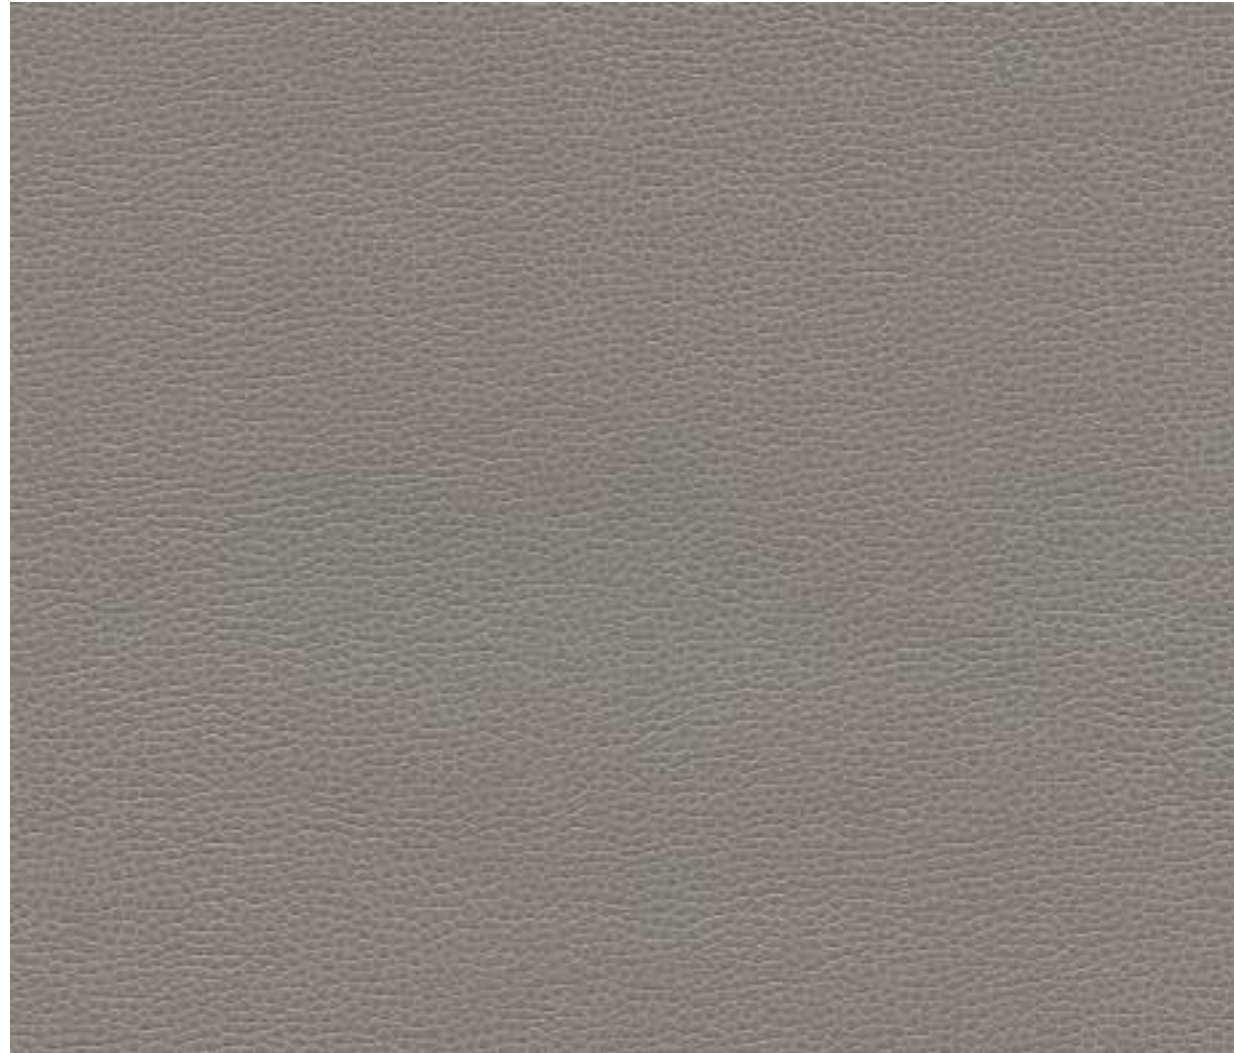


363-3152 Parchment



363-3142 Camel



363-2695 Aquamarine




363-7239 Aqua Spring




363-3189 Barley




363-3145 Bronze



363-2604 Stone Blue




363-7309 Malibu



363-3786 Buttered Toffee



363-1444 Fireclay




363-2792 Lake Blue



363-4362 Old Lime



363-5258 Sun Shower




363-1387 Dogwood



363-2672 Corn Flour



363-4363 Olive Moss




363-5715 Snow



363-5818 Ash




363-5817 Shale




363-5011 Battleship



363-5845 Ebony




363-3141 Fields




363-1443 Rumba Red




363-2680 Atlantic



363-7273 Aspen Green




363-3464 Tusk



363-3463 Cocoa



363-3785 Desert Taupe



363-3391 Sparrow




363-3037 Horsehair



363-3462 Woodpecker



363-9414 Merlot



363-9387 Moroccan Fig

# Promessa from Ultrafabrics

---

## Application

Interior Upholstery

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Recycled Polyester, 35% Rayon Backing

### Weight:

Approx. 11.5 oz. Per Square Yard  
Approx. 390 Grams Per Square Metre

### Thickness:

Approx. 1.1 Millimetres

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 180,000 Rubs (Martindale)\*  
\*meets or exceeds

### Hydrolysis:

16 Weeks  
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D751

Tensile Strength: BS EN ISO 1421

## Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4  
ISO 105 B02, Grade 6  
Crocking: AATCC 8, Grade 4-5 Wet & Dry

## Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 - Pass
- NFPA 260 - Class 1
- UFAC - Class 1
- AB 2998

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8
- BS EN 1021 Parts 1 & 2

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



[ultrafabricsinc.com](http://ultrafabricsinc.com)

Ultrafabrics® and logo, and Promessa® are registered trademarks of Ultrafabrics Inc. Made in Japan.

