


Ultraleather —
Ultrafabrics





291-5684 Arctic

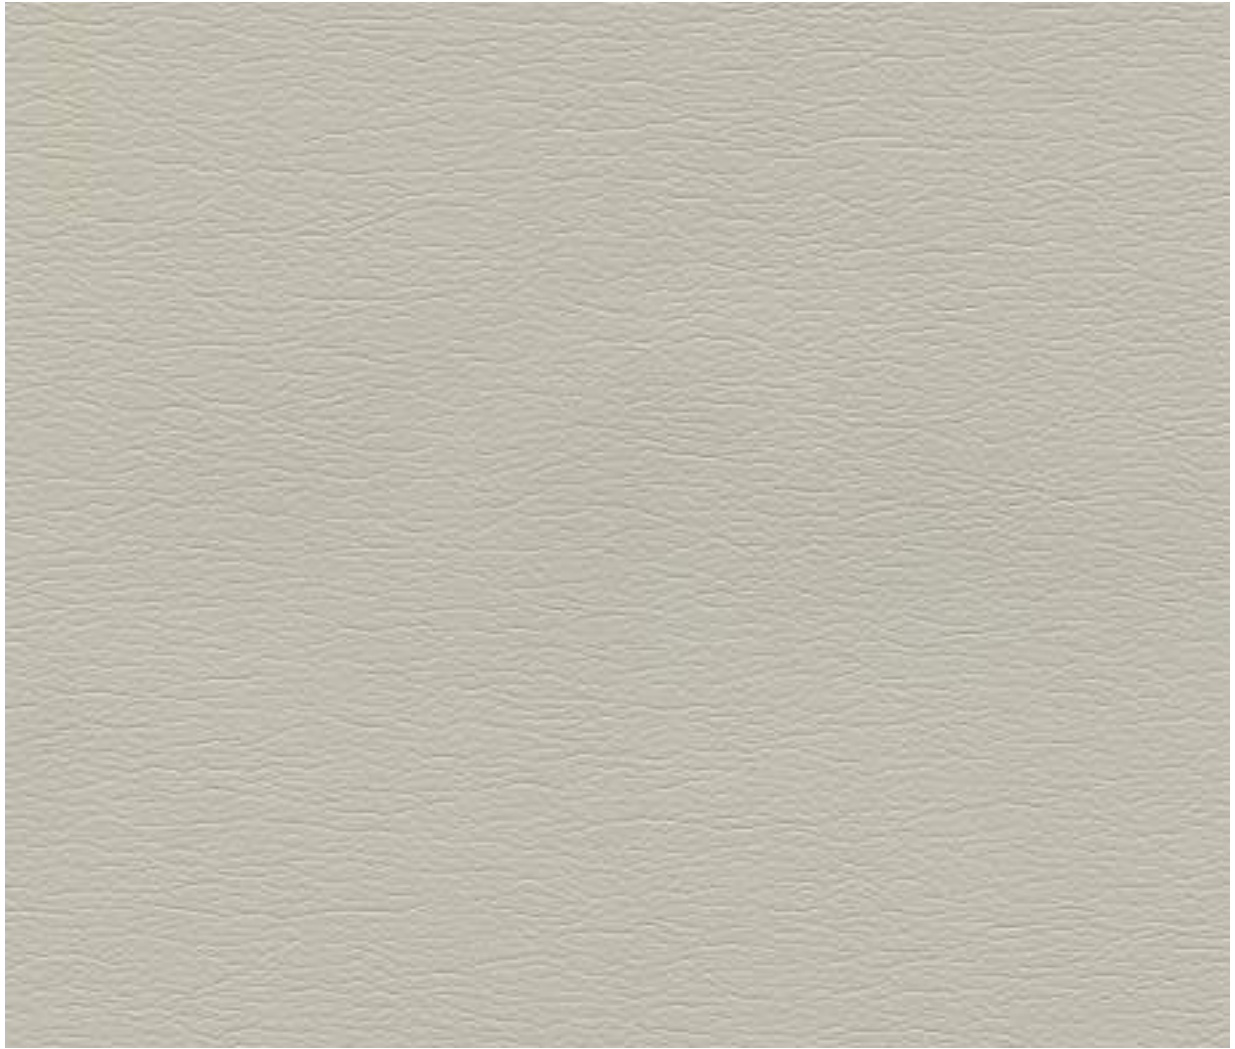

291-0001 White



291-5805 Ermine



291-5714 Ice



291-5668 Silver Pearl



291-5666 Dove Grey




291-5040 Elephant



291-5708 Granite



291-5763 Charcoal



291-5806 Schooner



291-5607 Raven Wing



291-3720 Light Oyster



291-3455 Milkweed



291-3599 Almond



291-3700 Ivory



291-5250 Sassy



291-3601 Doe



291-3609 Buff



291-3850 Sand



291-3719 Champagne



291-8243 Apricot



291-3729 Tan



291-3926 Cashmere



291-3851 Chamois



291-3778 Pecan



291-6588 Salmon



291-5676 Pelican



291-3183 Pine Cone



291-1256 Papyrus



291-8219 Adobe



291-8233 Autumn Leaf



291-3602 Stone



291-3523 Cave



291-3779 Taupe



291-3612 Curry



291-1347 Poppy



291-3777 Walnut



291-3666 Fudge



291-3205 Hot Chocolate



291-3610 Hide



291-1176 Red



291-7214 Boysenberry



291-9385 Plum



291-2552 Riviera



291-2527 Lagoon



291-5200 Citrus



291-1311 Brick



291-3469 Garnet



291-2685 Bayou



291-2553 Cyan



291-4460 Parrot



291-6580 Sorbet



291-2551 Baltic



291-2508 Rain Dance



291-2507 St. John



291-4454 Sonora



291-1334 Toro



291-2555 Nile



291-2509 Poseidon



291-4314 Herbal Mist



291-4430 Eucalyptus



291-1312 Chianti



291-2556 Admiral



291-2478 Diplomat Blue



291-4351 Shetland



291-4313 Sweetgrass



Ultraleather from Ultrafabrics

Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface

100% Reinforced Rayon Backing

Weight:

Approx. 9.7 oz. Per Square Yard

Approx. 330 Grams Per Square Metre

Thickness:

Approx. 0.95 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*

BS EN ISO 12947-2 / 180,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

14+ Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Tensile Strength: BS EN ISO 1421

Colorfastness

Light Fastness: AATCC 16.3, 200 Hours, Grade 4

ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

Due to the nature of numerous different computer and printer settings, the fabric & supply images displayed on this page may not represent the actual product in its entirety. All supplied fabric & supply images in their printed form are to be used for reference only and may not look exactly as shown.

En raison de la nature de nombreux paramètres d'ordinateur et d'imprimante différents, les images de tissu et de fournitures affichées sur cette page peuvent ne pas représenter le produit réel dans son intégralité. Toutes les images de tissu et de fournitures fournies sous leur forme imprimée doivent être utilisées à titre de référence uniquement et peuvent ne pas ressembler exactement à celles illustrées.



ultrafabricsinc.com

Ultrafabrics® and logo, and Ultraleather® are registered trademarks of Ultrafabrics Inc. Made in Japan.

